


# HYDROSOLV

**DEGREASING EMULSION  
FOR MECHANICAL PARTS**

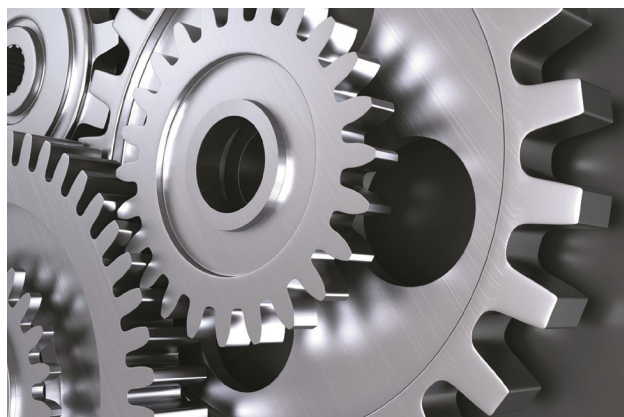

## 7 good reasons for using **HYDROSOLV**


1. Chlorinated solvent **free**.
2. Its **evaporation** speed is high. Is recommended for frequent use during degreasing operations.
3. Practically **odourless**.
4. Powerful **degreaser** and high-quality solvent for oils.
5. **Compatible** with most plastics.
6. No **corrosion** on metals.
7. **No deposits** after evaporation.

## Particularly suitable for use in:



Industry

Cleans, degreases mechanical parts soiled by grease, oils and fuel.  
For cleaning switched off electric devices.

Characteristics	DEGREASING FOUNTAIN	Instructions for use
<p>Appearance: colourless liquid Flash point NFT ISO 2592: 43 °C Density: 0.78 Kauri-butanol Index: 32</p> <p>For more information, see MSDS.</p>		<p>In the DEGREASING FOUNTAIN</p> <p>After switching on the pump, rub parts with the brush until clean. Leave to dry by evaporation.</p>

GB27032023/2

**7 en +**

**DEVAX:** Penetrating lubricant with PTFE

This datasheet supersedes previous documents. The information contained in these data sheets is based on our present knowledge and experience and is given as indication only. Under no circumstances does it engage our responsibility in the event of misuse of our products. Non-contractual photos and images.



Tél 02 97 54 50 00  
Www.7darmor.fr

